



GENERAL LAYOUT FOR SINGLE SPAN

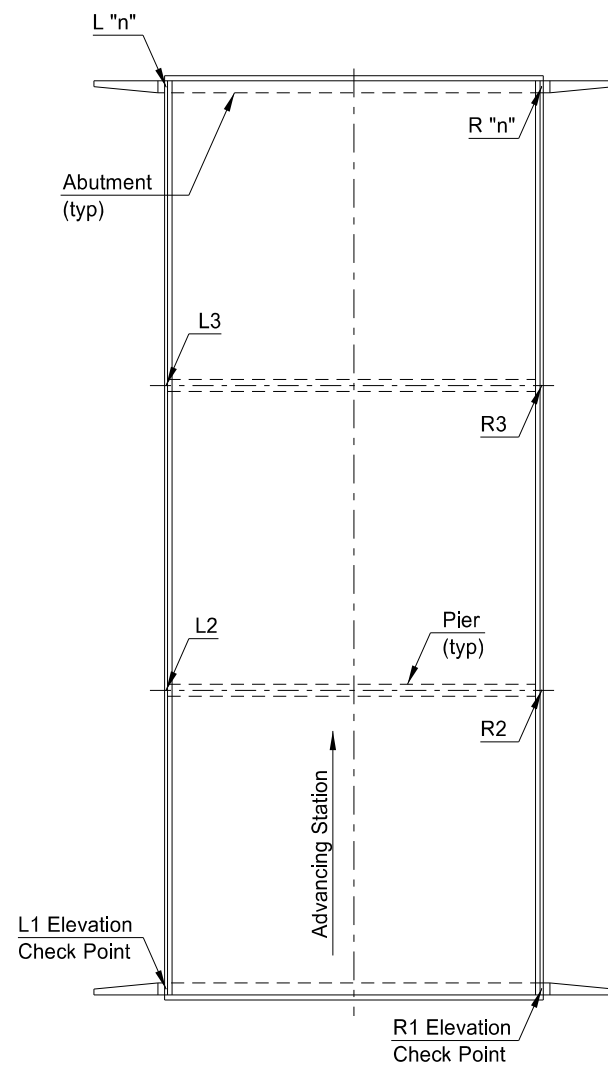


GENERAL LAYOUT FOR MULTIPLE SPAN

BRIDGE BENCH MARKS

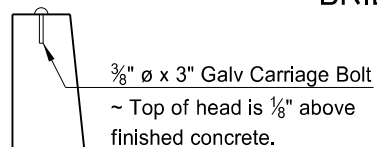

CHECK POINT LOCATION DETAIL

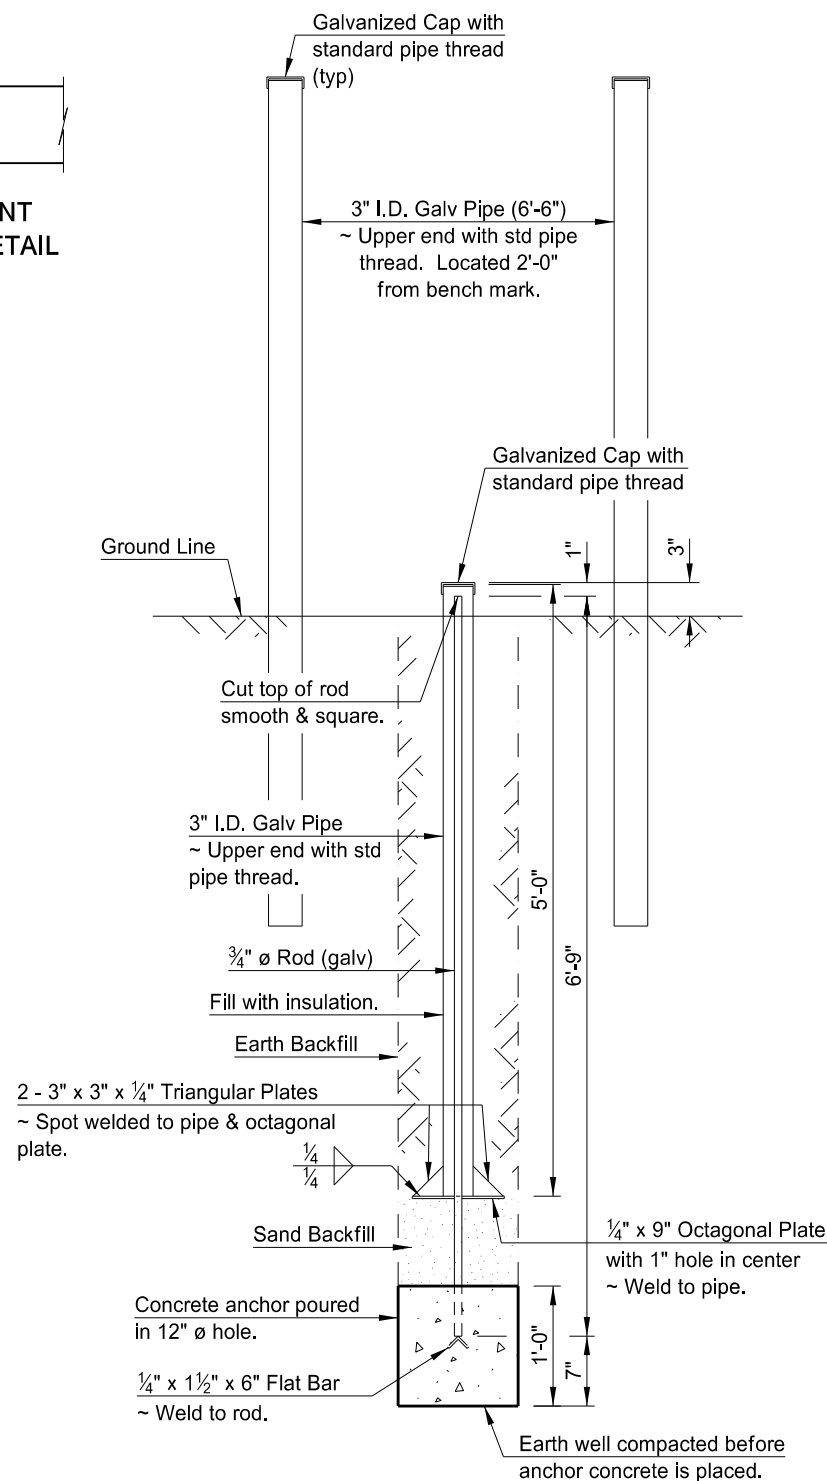

BENCH MARK DETAIL

NOTES:

Elevation check points shall consist of 3/8" ø x 3" galvanized carriage bolts (or equal) set in the concrete barrier at the points indicated on the General Layout sketches. The top of the bolt head shall project above the finished concrete 1/8". Elevation check points shall be placed on each barrier over each unit of the substructure for each bridge at a structural location.

Two bench marks as detailed hereon shall be set at diagonal opposite positions away from the structure location and at least 300 feet from the nearest point on the bridge or bridges (if more than one at a location). These bench marks shall be constructed as detailed on this sheet and located near the Highway Right of Way lines. The two pipes shall extend 4'-0" above ground and be painted with two coats of white paint suitable for galvanized steel surfaces.

The Project Engineer shall run a set of levels determining the elevation of each check point on the structure and the two bench marks immediately after the completion of the bridge. Bench Mark #1 can be listed as having elevation 1000 or the actual surveyed elevation. This information shall be recorded on SFN 13420 and submitted to the Bridge Engineer with adequate information locating each check point and bench mark.

All metal parts are to be hot dip galvanized after punching, shearing, welding and fabrication.

Threads of cap and pipe are not to be galvanized. At the time of installation these threads are to be coated with synthetic grease with teflon and cap screwed to a snug fit.

METHOD OF MEASUREMENT:

Each set of Bridge Bench Marks consisting of two bench marks and the required number of elevation check points shall be considered as one unit for bidding purposes and the quantity to be paid for shall be the number of sets of bridge bench marks which have been installed complete in place and accepted by the Engineer.

BASIS OF PAYMENT:

Bridge Bench Marks shall be paid for at the contract price bid for each set of Bridge Bench Marks, which price shall be full compensation for all excavation, backfill and clean-up, and for furnishing, hauling and placing all elevation check points, galvanized pipe, caps, rods, sand backfill, concrete, rock equipment, tools and incidentals, including galvanizing and greasing, necessary to complete this item.

GALVANIZING:

After fabrication the complete assembly shall be hot-dip galvanized.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
09/14/11	
REVISIONS	
DATE	CHANGE
09/03/19	UPDATED SIGNATURE

This document was originally issued and sealed by  
 Jon Ketterling  
 Registration Number  
 PE- 4684,  
 on 09/03/19 and the original document is stored at the  
 North Dakota Department  
 of Transportation