




PORTABLE PRECAST CONCRETE MEDIAN BARRIER
(TEMPORARY USAGE)

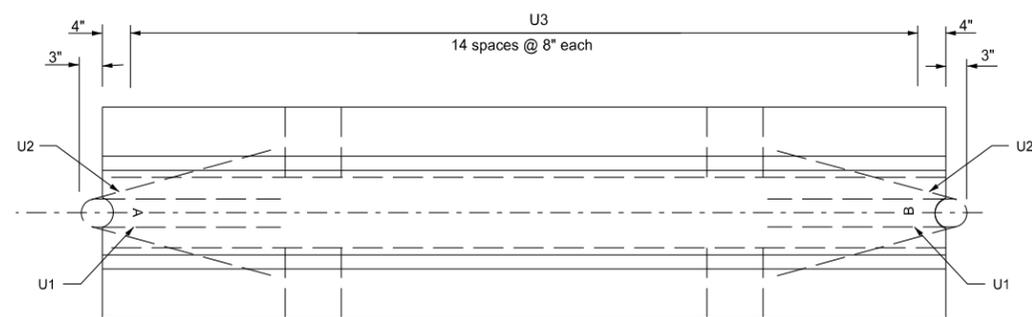


Plan View

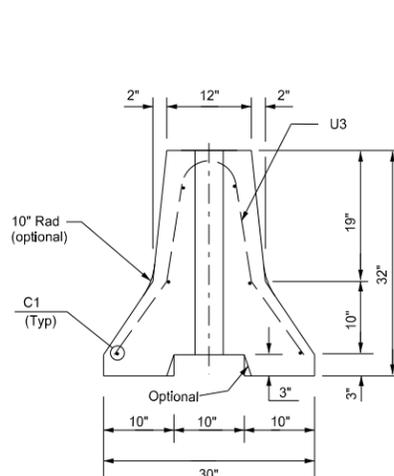


End View

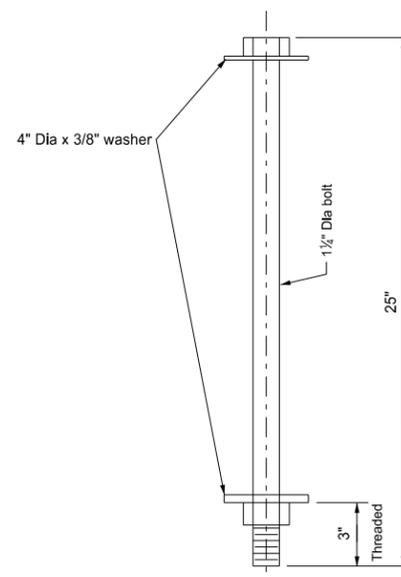


Connecting Bolt Detail
(One per 10 Ft section)

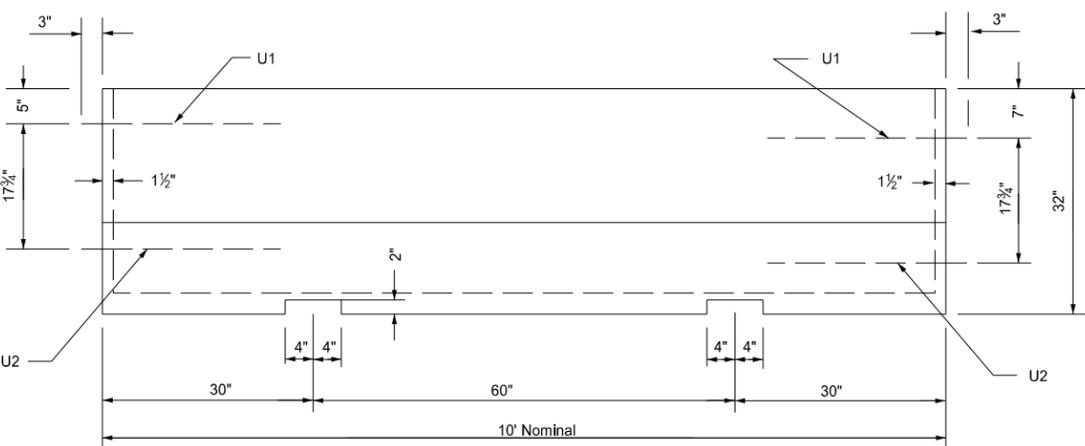

Side View

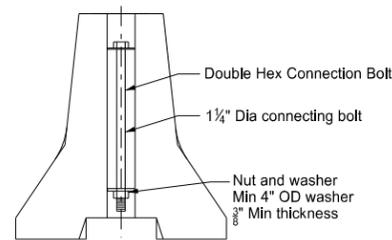

Bolt Connection Detail

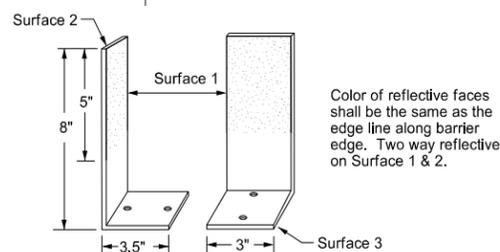


Barrier Marker Detail

Reflective Tape
The reflector shall be a retroreflective, acrylic microprism material with acrylic backing, 3" wide, providing the following minimum optical performance with an observation angle of 0.1° measured in candlepower:


Entrance Angle	Specific Intensity
Yellow - 4"	136
White - 4"	200

Adhesive
Markers shall be temporarily mounted to the portable concrete barrier with factory applied solid butyl rubber 1/8" thick, 2" wide on 2 1/4" wide release paper on surface 3.


Bar List				
Mark	Size	No.	Length	Shape
C1	4	6	9'- 4"	Straight
U1	4	2	4'- 8"	Bent
U2	4	2	4'- 10 1/4"	Bent
U3	4	15	5'- 4"	Bent

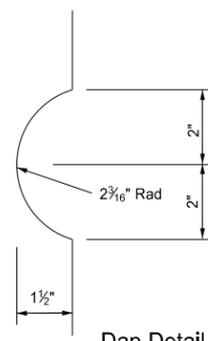

Dap Detail

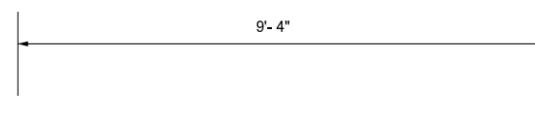


C1 Bar Detail

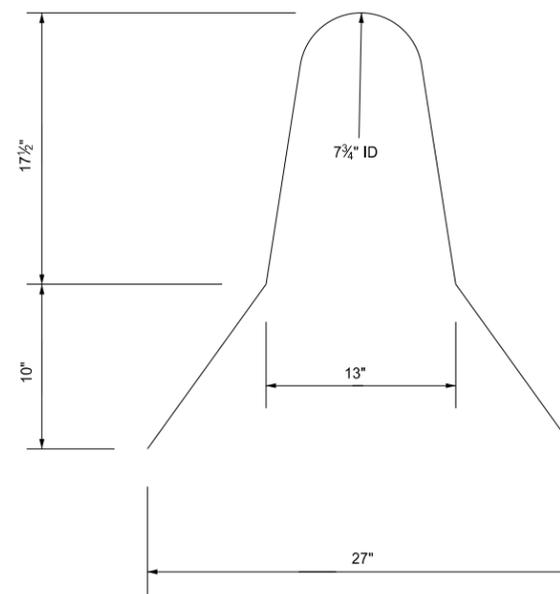


U3 Bar Detail

Notes:

- All exposed hardware shall be galvanized as per ASTM A153, except for the loop inserts.
- Concrete shall be Class AAE-3.
- All steel shall conform to Section 612 of the NDDOT Standard Specifications.
- Barrier ends shall be imprinted A and B as shown with 4 inch letters. Field placement shall match the A end with the B end.
- Barrier markers shall be placed at the center of the barrier at 20' centers.
- Barrier sections shall be connected together with the 1 1/4" Dia A-307 double hex connecting bolt. The bottom nut and washer connection shall be maintained by the contractor for the duration of the barrier installation.
- Barrier shall be placed such that openings between individual sections shall be kept to a minimum.

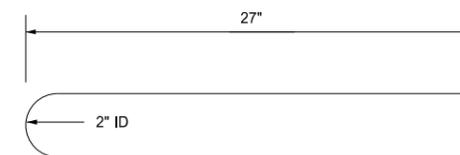

U1 Bar Detail

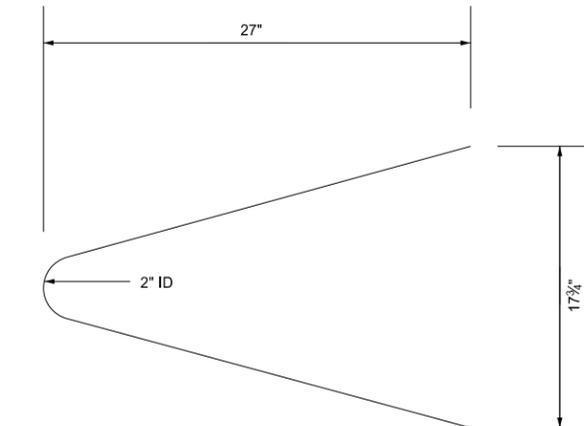

U2 Bar Detail

Marker Body
The marker shall be made of a high impact, weatherable engineering thermo-plastic material which conforms to the following:

Property	Result	ASTM Test Method
Thickness (min)	.090"	—
Tensile strength (min psi) @ yield	5,500	D638
Impact strength @ -20°F (ft-lbs/in of notch)	3.2	D256 Method A
Impact strength @ 73°F (ft-lbs/in of notch)	14.0	D256 Method A
Flexural strength, PSI 1/4" @ 73°F	8,000	D790
Flexural modulus, PSI 1/4" @ 73°F	300,000	D790
Elongation @ yield	30%	D638

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-20-12	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE- 2930,
on 07/20/12 and the original document is stored at the
North Dakota Department
of Transportation