
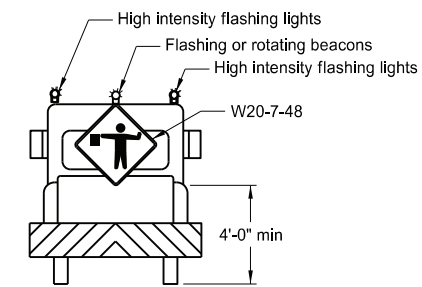


# TRAFFIC CONTROL FOR CORING OF HOT BITUMINOUS PAVEMENT



D-704-2

## Two Lane, Two Way Roadways

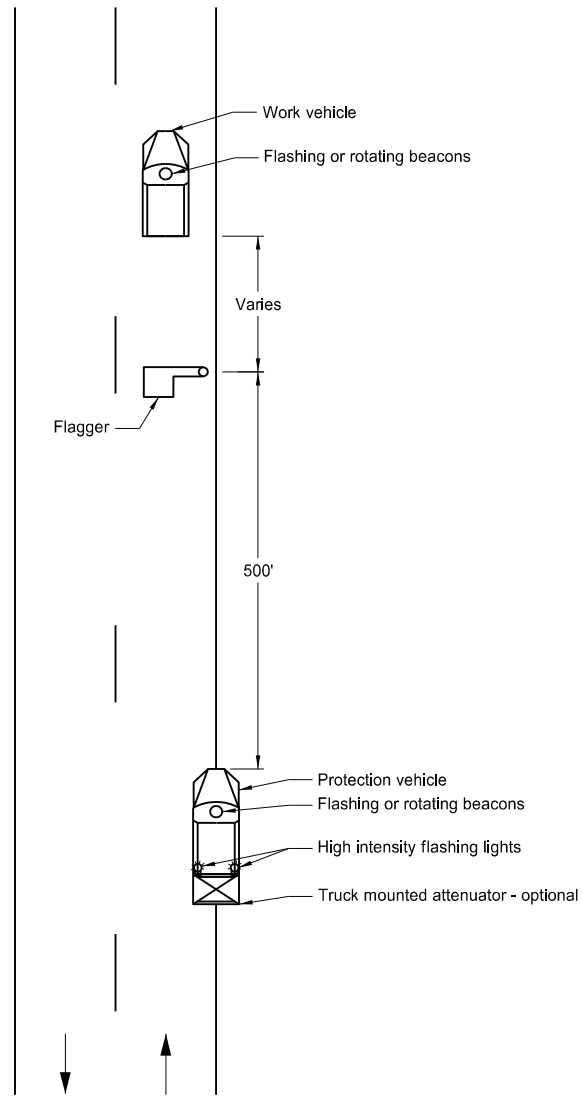

Typical Protection Vehicle

## Multilane Roadways

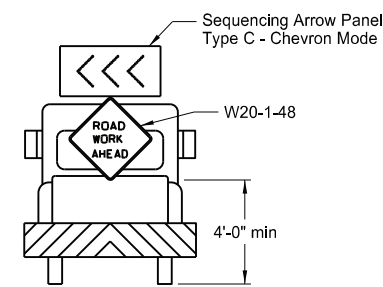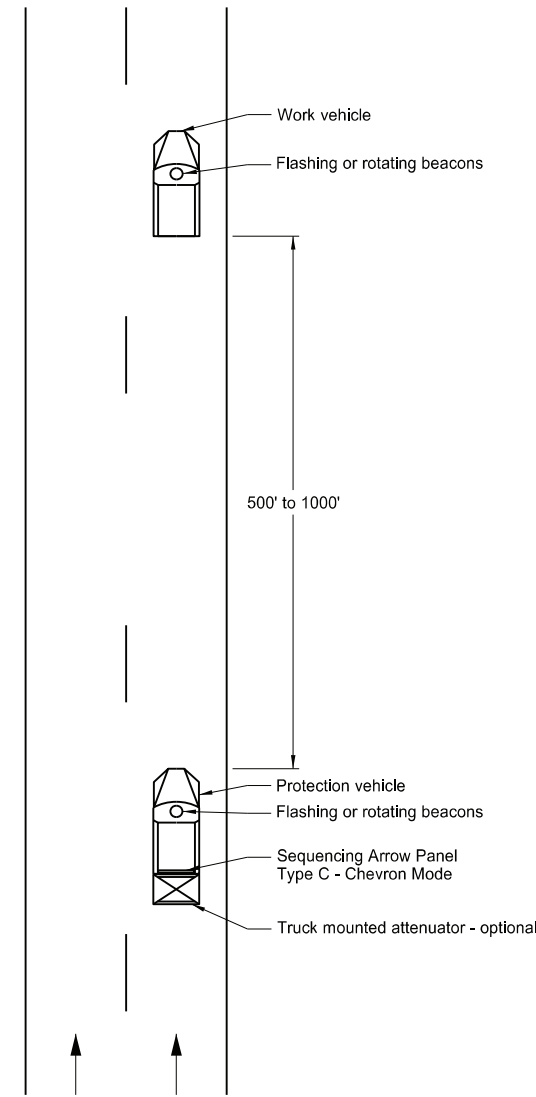

Typical Protection Vehicle

Notes:

1. Display a 360 degree rotating, flashing, oscillating or strobe light on the working vehicle.
2. Display a 360 degree rotating, flashing, oscillating or strobe light on the shadow vehicle. Operate a sequencing arrow panel Type C in chevron mode on the shadow vehicle for Multilane Roadway.
3. Use these layouts during daylight hours and in areas of good visibility only.
4. Use flagger to protect the work area and warn oncoming traffic for two lane, two way roadway.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature

08/01/24