



SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS REGULATORY, WARNING AND GUIDE SIGNS

D-754-44


- Notes:
1. Use 0.100 minimum thickness sign backing material.
 2. Use 1½"x1½" perforated square tube stringers.
 3. Punch holes round for ⅜" bolt.

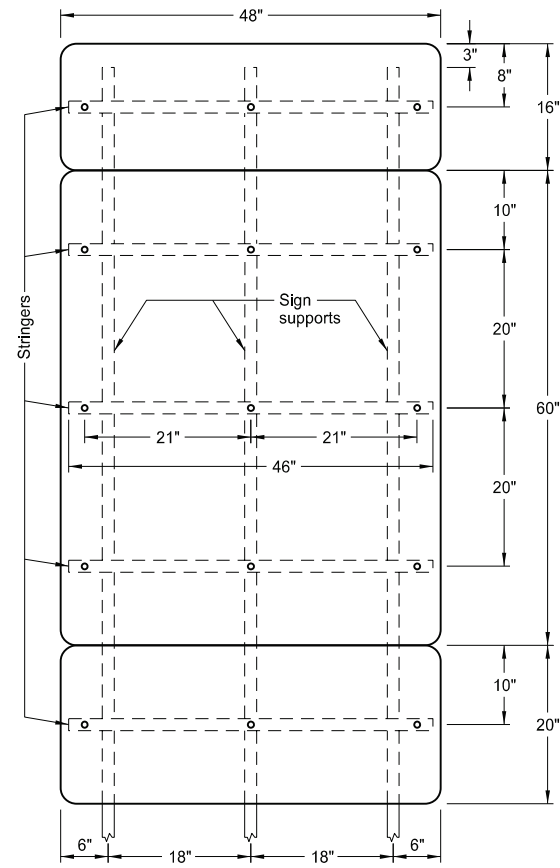


3 Posts
ASSEMBLY NO. 76

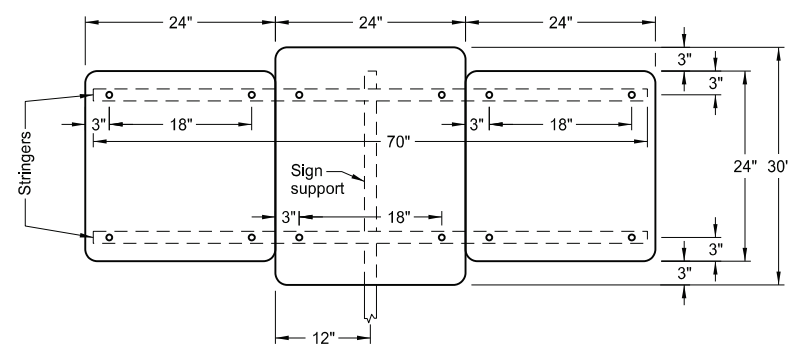

1 Post

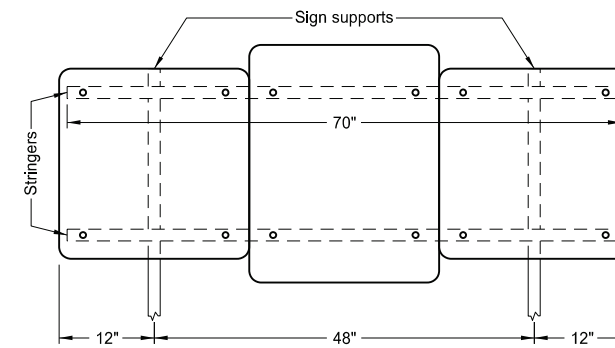

2 Posts
ASSEMBLY NO. 77

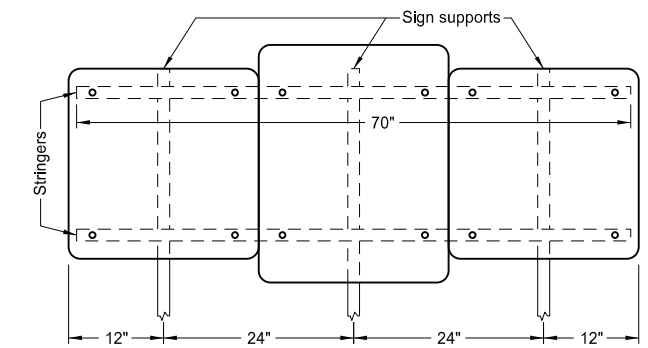

3 Posts

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-22-12	
REVISIONS	
DATE	CHANGE
8-30-18	Updated notes to active voice.
9-04-19	New Design Engineer PE Stamp.
8-06-24	Electronic Stamp/Signature.



08/06/24